
## **NEUTRAL SERIES**

# N1040 SR CDF (Neutral)



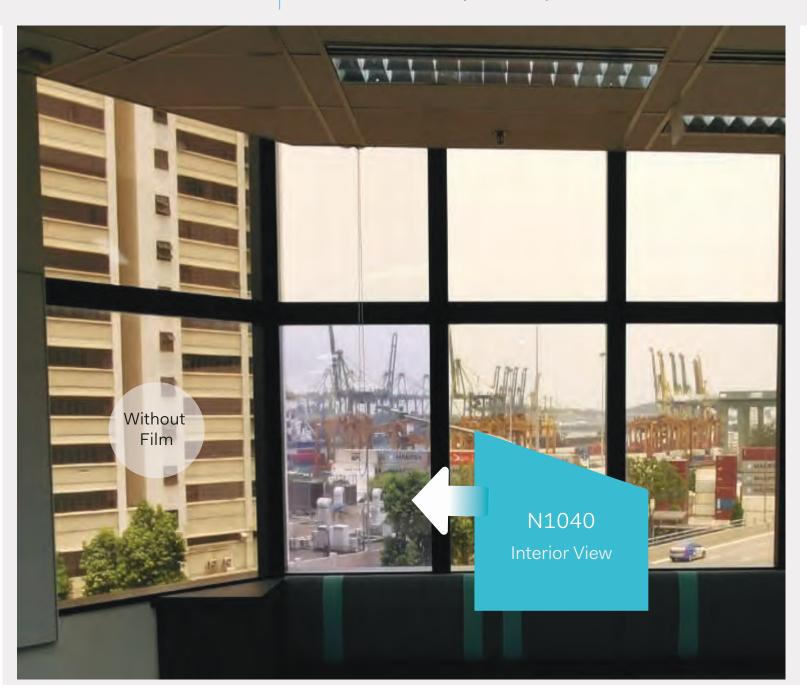

### PERFORMANCE DATA

Visible Light Transmittance	37 %
Total Solar Energy Rejected	51 %
Ultraviolet Rejected	99 %

#### **TECHNICAL DEFINITIONS**

#### Visible Light Transmittance

The percentage of visible light that passess directly through filmed glass.

#### Total Solar Energy Rejected

The percentage of total solar energy rejected by filmed glass.

### Ultraviolet Rejected

The percentage of ultraviolet light that is rejected by filmed glass.

Window Film Viewer www.windowcool.com

Window Tinting Service | LLumar Singapore